


combitech° pull-out trestle

CO	mbitech [®] profiles			
	oduct name	Dimension		
0	square tube, untreated aluminium	35.5×2.4mm		
0	square tube, untreated aluminium	29.5×2.4mm		
С	right-angle tube, untreated aluminium 2	3.5 × 43.5 × 1.5 mm		
0	square tube, untreated aluminium 3	5.5×68.6×2.4 mm		
0	square U, untreated aluminium	35.5×2.4 mm		
0	thread rod, galvanized steel	M 8		
combitech' small parts				
CO	mbitech [®] small parts			
	mbitech' small parts oduct name	Dimension		
Pro		Dimension 160 mm		
Pro	oduct name	2		
Pro ()	junction plate, aluminium	160 mm		
Pro	duct name junction plate, aluminium lamellar plugs round, PE black	160 mm 11.5 mm		
Pro () () ()	junction plate, aluminium lamellar plugs round, PE black knurled nut, PVC/brass black	160 mm 11.5 mm M 8 M 8		
Prc () () () ()	junction plate, aluminium lamellar plugs round, PE black knurled nut, PVC/brass black adjusting foot, PVC black	160 mm 11.5 mm M 8 M 8		
Prc 3 0 1 1 3	junction plate, aluminium lamellar plugs round, PE black knurled nut, PVC/brass black adjusting foot, PVC black hexagonal cap nut, self-tapping galvanized stee	160 mm 11.5 mm M 8 M 8 el M 8		

Notes



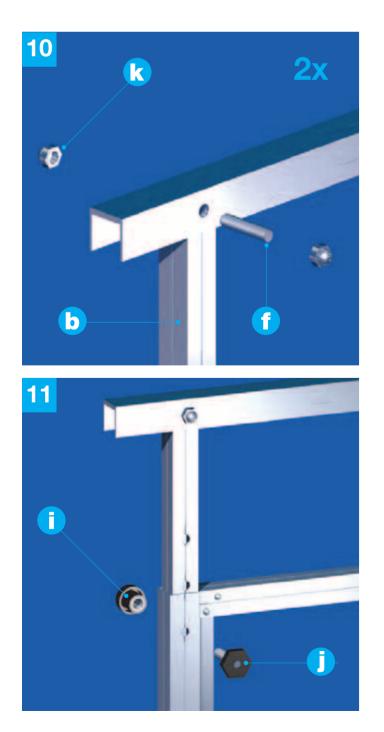

Shop	oping list	Pre-cut parts list	
-			
Item no.	Total quantity	Quantity	Pre-cut part
25174	1 m	2	495 mm
25172	1 m	2	495 mm
25330	2 m	2	600 mm
25894	1 m	2	495 mm
25414	1 m	1	800 mm
30004	1 m	2	57 mm
Item no.	Total quantity	Quantity	
29798	4 bags	4	
29804	1 bag	4	
30164	6 bags	6	
30354	6 bags	6	
30114	1 bag	4	
30274	1 bag	4	
		16	

Important advice!

Assembly instructions

All parts must be original **alfer**^{*} parts. Damaged parts should not be used. Basic technical knowledge is required for assembly.

In case of technical difficulties, advice can in some circumstances be sought from staff at the hardware store or possibly from **alfer**^{*} itself. If difficulties arise during assembly, an enquiry should always be put to **alfer**^{*} before changing components. Do not deviate from the assembly instructions. Changes to materials or deviations from the assembly instructions can cause safety defects, which in case of damage may well be attributed to such a deviation. In case of damage arising from such deviations, **alfer**^{*} accepts no liability.

Instructions for use

The permitted loading capacity must not be exceeded. Inappropriate use will result in the right to compensation being excluded.

Wutöschingen June 2002

alfer^{*} aluminium Gesellschaft mbH Horheim, Industriestraße 7 · D-79793 Wutöschingen tel.: +49 (0) 77 46 / 92 01-0 · fax: 92 01-92 email: info.eng@alfer.com

You can find more ideas on the Internet!




Important advice!

Technical data:

combitech° pull-out trestle dimensions:

length	49.5 cm
width	80.0 cm
height min.	60.0 cm
height max.	80.0 cm adjustable in stages
loading cap.	max. 50 kg

All dimensions are reference values. Subject to technical changes.

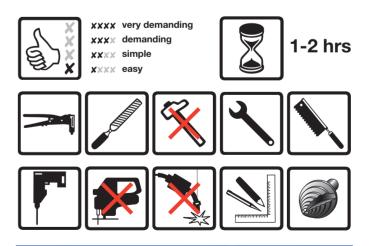



alfer®

combitech[®] construction plan pull-out trestle






You can find more ideas on the Internet!

aifer' aluminium Gesellschaft mbH Horheim, Industriestraße 7 ⋅ D-79793 Wutöschingen tel.: +49(0) 7746 / 9201-0 ⋅ fax: 9201-92 email: info.eng@alfer.com

20



Your dealer:

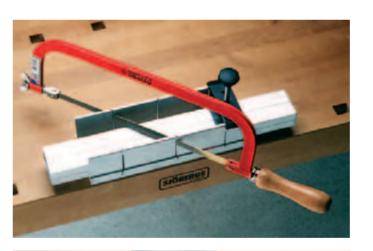





242606"3116" 242609542



